


Code: **0201W**

25-40 180 Circulation pump

<https://www.ferrocompany.com/product-2900-0201W.html>

Individual packaging: **1, package with bar code allowing for retail sale**

Collective packaging: **8**

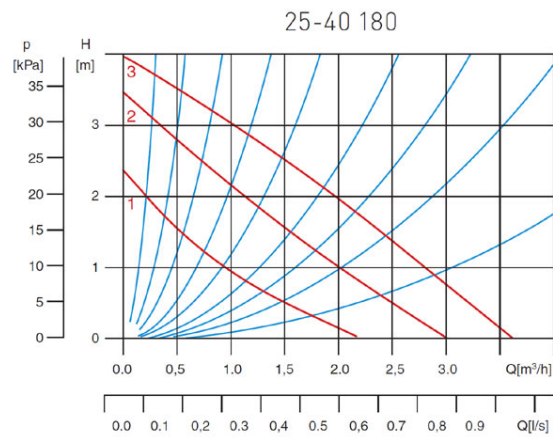

Model	25-40 180
Operation range	0,2 - 3,5 m³/h
Lifting height	max. 3,8 m
Liquid temperature	min. +2°C, max. +110°C
Type of pumped liquid	This circulation pump is suitable for drinking water only
Maximum pressure	10 bar
IP protection class	IP 44
Insulation class	H
Cable Gland	PG 11
Installation	axle shaft in a horizontal position, the terminal box located anywhere except under the pump
Voltage	50-60 Hz, ~230V
Power consumption (I,II,III)	35/45/65 W
Connection Spacing	180 mm
Connection	G1 1/2
Ambient temperature	min. +2°C, max. +40°C